

# BrightEye 15

## SD SDI to Analog Converter with Frame Sync/Genlock


BrightEye 15 is a digital to analog video converter with a timeable output. It's perfect for feeding analog switchers and routers, where signal timing is required.

BrightEye 15 has an SD SDI video input and a reference input. The input signal is converted to analog composite and synchronized (genlocked) to the reference signal. The analog composite output is fully timed with respect to the reference, including ScH phase.

Basic controls are provided on the front panel. With BrightEye Mac or PC software, you can control video proc functions; gain, chroma, pedestal, and hue. The vertical interval can be passed or blanked.

### Features

- **Feed analog switchers and routers**
- **SD SDI input**
- **Analog video output**
- **Timing control for output**

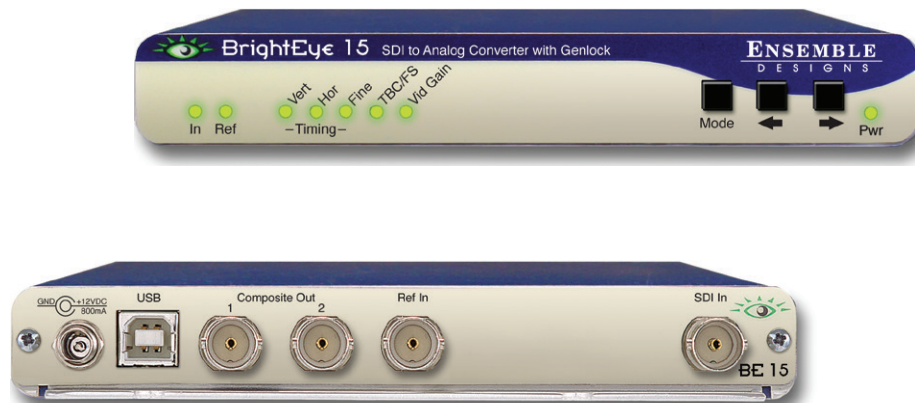

## SD SDI to Analog Converter with Frame Sync/Genlock

### Serial Digital Input

Number	One
Signal Type	270 Mb/s SD Serial Digital SMPTE 259M
Impedance	75 $\Omega$
Return Loss	>15dB
Max Cable Length	300 meters
Automatic Input Cable Equalization	

### Reference Input

Number	One
Type	1 V P-P Composite Video, PAL or NTSC
Impedance	75 $\Omega$
Return Loss	>40 dB

### Analog Video Output

Number	Two
Type	Composite PAL or NTSC (follows input)
Delay	Adjustable from < 90 $\mu$ Sec to 1 frame
Return Loss	>40 dB
Output	DC < 100 mV

### SDI to Analog Performance

Bit Resolution	12 bit output reconstruction 8 x oversampling
Signal to Noise	>65 dB
Timing Window	Infinite (with respect to reference)
Output	ScH Phase matches reference
Timing Resolution	Adjustable to within 1 degree of subcarrier
Frequency Response	$\pm 0.1$ dB, 0 to 5.5 MHz
K Factor	<1%
ScH Phase Error	< $\pm 2$ degrees
Differential Phase	<1 degree
Differential Gain	<1%

### General Specifications

Size	5.63"W x 0.8"H x 5.98"D (143 mm x 21 mm x 152 mm) including connectors and flange
Weight	14 oz
Power	12 volts, 3 watts (100-230 VAC modular power supply)
Temperature Range	0 to 40° C ambient (all specs met)
Relative Humidity	0 to 95° non-condensing
Altitude	0 to 10,000 ft.

