


Description:

The RMD9024 is a 4U high rack mountable LCD monitor that offers video and audio monitoring with high resolution of 800x480. The unit is equipped with full digital processing technology, and its screens feature anti-glare. The model accepts HD-SDI, SD-SDI and analog composite signal. A high display quality of all video signals can be ensured by full digital processing. The precise scaling chip as well as Gamma correction is a guarantee for high quality display image.



Features:

- ▶ Auto-Sensing HD/SD-SDI/Composite signal
- ▶ Embedded Audio Support/4 or 8 Channel Audio Meters (VU & PPM)
- ▶ H/V Delay; Under Scan; Safe & Area Marker; Aspect Ratio; Blue Only; Tally
- ▶ 1 Pair Audio Monitoring via Headphone Jack
- ▶ Built-in Speaker
- ▶ Waveform and Vectorscope display for SDI signal
- ▶ Dynamic UMD supporting TSL and Image Video protocol
- ▶ Gamma and color temperature correction
- ▶ OSD Tally support
- ▶ LED Tally support

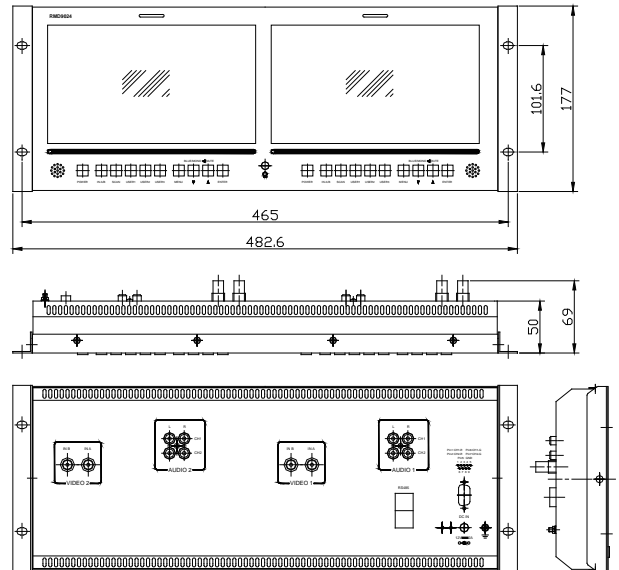

Specifications: specifications are subject to change without notice

Size	4U
Number of Screens	2
Display area	9" diagonal (7.795"H × 4.413"V) (198mm × 112.08mm)
Viewing angle	140°H × 120° V
Color depth	16.2M
Resolution	800H × 480V
Dot Pitch	0.2475mm (H) × 0.2335mm (V)
Contrast Ratio	400:1

Brightness	300cd/m ²
Dimensions	19.1"W × 7"H × 2.7"D (486mm × 178mm × 69mm)
Power consumption	12VDC/ 10 watts. (3.8 Amps max -CE & UL compliant)
Video Input	2 auto-sensing HD/SD-SDI and composite
Video Output	none
Audio Input	4 analog audio
Audio Output	none

Ordering Information:

RMD9024-HSC	LCD Monitor supports HD/SD-SDI, Analog Composite signal
RMD9024-SC	LCD Monitor supports SD-SDI, Analog Composite signal
RMD9024-V	LCD Monitor supports Analog Composite signal

【The pictures are just for reference and subject to actuality】