


Description:

The RMS8424 is a 4U high rack mountable LCD monitor that offers video and audio monitoring with high resolution of 800x600. The unit is equipped with full digital processing technology, and its screens feature anti-glare. The model accepts HD-SDI, SD-SDI and analog composite signal. A high display quality of all video signals can be ensured by full digital processing. The precise scaling chip as well as Gamma correction is a guarantee for high quality display image.



Features:

- ▶ Auto-Sensing HD/SD-SDI ☒ Composite signal
- ▶ Embedded Audio Support ☒ 4 or 8 Channel Audio Meters (VU & PPM)
- ▶ H/V Delay; Under Scan; Safe & Area Marker; Aspect Ratio; Blue Only; Tally
- ▶ 1 Pair Audio Monitoring via Headphone Jack
- ▶ Built-in Speaker
- ▶ Waveform and Vectorscope display for SDI signal
- ▶ Dynamic UMD supporting TSL and Image Video protocol
- ▶ Gamma and color temperature correction
- ▶ OSD Tally support
- ▶ LED Tally support

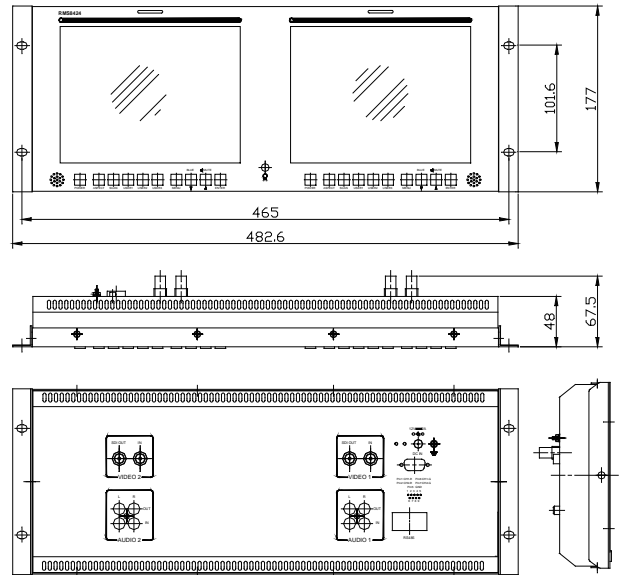

Specification: specifications are subject to change without notice

Size	4U	Brightness	350cd/m ²
Number of Screens	2	Dimensions	19.1"W × 7"H × 2.7"D (486mm × 178mm × 68mm)
Display area	8.4" diagonal (6.43"H × 4.09"V) (170.4mm × 127.8mm)	Power consumption	12VDC/ 10 watts. (3.8 Amps max -CE & UL compliant)
Viewing angle	160°H × 125° V	Video Input	1 Auto-sensing HD/SD-SDI and composite
Color depth	16.2M	Video Output	1 HD/SD-SDI loop out
Resolution	800H × 600V	Audio Input	2 analog audio
Dot Pitch	0.213mm (H) × 0.213mm (V)	Audio Output	2 analog audio
Contrast Ratio	320:1		

Ordering Information:

- RMS8424-HSC LCD Monitor supports HD/SD-SDI, Analog Composite signal
- RMS8424-SC LCD Monitor supports SD-SDI, Analog Composite signal

【The pictures are just for reference and subject to actuality】